

# Compact pressure switch for multiple actuators

GW...A5  
GW...A5/1

**DUNGS®**  
Combustion Controls

5.02



## Technical description

The GW...A5 pressure switch is a compact pressure switch as per EN 1854 for DUNGS multiple actuators.

The pressure switches are suitable for switching a circuit on, off or over on changes in actual pressure relative to the set switching point (reference value).

The switching point can be set easily and quickly using a setting wheel provided with a scale without using a pressure gauge.

## Application

Pressure switches for DUNGS multiple actuators GasMultiBloc and DMV double solenoid valve which can be either mounted directly on housing or by using an adapter.

Suitable for gases of families 1,2,3 and other neutral gaseous media.

## Approvals

EC type test approval as per EC Gas Appliance Directive:

GW...A5                      CE-0085 AO 3220

EC type test approval as per EC Pressure Equipment Directive:

GW...A5                      CE0036


Pressure switch class "S" as per EN 1854.

Approvals in other important gas-consuming countries..

**Functional description**  
Single-acting pressure switch in over-pressure range.  
The pressure switches operate without any power supply.

**Switching response**  
**GW...A5**  
Short response time during pressure fluctuations.

**GW...A5/1**  
Slow response time during short-term pressure fluctuations by additional damping nozzle.  
**Pressure Switch**  
The GW...A5 is a single-acting pressure switch acting in pressure range. The control unit responds to pressure. If the set reference value is exceeded or undershot, the circuit is switched on, off or over.

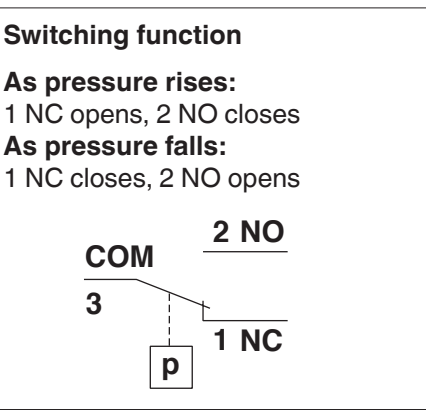


**Specifications**

|                         |                                                                                                                             |                                                                    |                                                             |                                                                    |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------|--------------------------------------------------------------------|
| Max. operating pressure | GW 3 A5 - GW 150 A5<br>GW 500 A5                                                                                            | 500 mbar (50 kPa)<br>600 mbar (60 kPa)                             |                                                             |                                                                    |
| Pressure connection     | O ring flange connection on underside of pressure switch                                                                    |                                                                    |                                                             |                                                                    |
| Measuring connection    | ø 9, length 10 mm, with screw plug                                                                                          |                                                                    |                                                             |                                                                    |
| Temperature range       | Ambient temperature<br>Medium temperature<br>Storage temperature                                                            | -15 °C to +70 °C<br>-15 °C to +70 °C<br>-30 °C to +80 °C           |                                                             |                                                                    |
| Materials               | Housing:<br>Switch:<br>Diaphragms:<br>Switching contact:                                                                    | Aluminium die casting<br>Polyamide<br>NBR<br>Ag                    |                                                             |                                                                    |
| Switching voltage       | AC eff. min. 24 V<br>DC min. 24 V                                                                                           | max. 250 V<br>max. 48 V                                            |                                                             |                                                                    |
| Nominal current         | <b>GW 10...500 A5</b><br>AC eff. max. 10 A                                                                                  | <b>GW 3 A5</b><br>AC eff. max. 6 A                                 |                                                             |                                                                    |
| Switching current       | AC eff. max. 6 A<br>AC eff. max. 3 A<br>AC eff.<br>DC<br>DC                                                                 | at cos φ 1<br>at cos φ 0,6<br>min. 20 mA<br>min. 20 mA<br>max. 1 A | AC eff. max. 4 A<br>AC eff. max. 2 A<br>AC eff.<br>DC<br>DC | at cos φ 1<br>at cos φ 0,6<br>min. 20 mA<br>min. 20 mA<br>max. 1 A |
| Electrical connection   | Plug connection for line sockets as per DIN EN 175 301-803, 3-pin, protection insulated without ground connection           |                                                                    |                                                             |                                                                    |
| Degree of protection    | IP 54 as per IEC 529 (EN 60529)                                                                                             |                                                                    |                                                             |                                                                    |
| Setting tolerance       | ±15% switching point deviation referred to reference value, adjusted at <b>pressure rises</b> , vertical diaphragm position |                                                                    |                                                             |                                                                    |

|                                  |                                                                                                                                                                                  |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Installation position</b><br> | <b>Standard installation position; if different observe the change in switching point:</b><br>GW 3...50 A5 max. ± 0,6 mbar<br>GW 150 A5 max. ± 1 mbar<br>GW 500 A5 max. ± 3 mbar |
|                                  | <b>In the horizontal installation position the switching pressure is increased.</b>                                                                                              |
|                                  | <b>When the pressure switch is mounted horizontally overhead, its switching pressure decreases.</b>                                                                              |
|                                  | <b>When the pressure switch is mounted in an intermediate position, its switching pressure deviates.</b>                                                                         |

## Designation

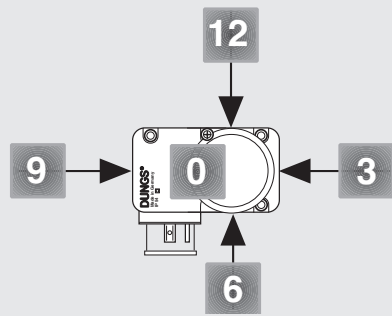

## GW 150 A5 [Ag-G3-MS6-V12]

- Pressure connection**  
V12  
Pressure connection G 1/4  
Position 12
- Test nipple**  
MS6  
Test nipple at position 6
- Electrical connection**  
G3  
Equipment connector, 3 pol  
protection-insulated, w/o grounding
- Contact material**  
Ag
- Setting ranges [mbar]**

|     |           |
|-----|-----------|
| 3   | 0,7 - 3   |
| 10  | 2 - 10    |
| 50  | 5 - 50    |
| 150 | 5 - 150   |
| 500 | 100 - 500 |
- Pressure switch design**
  - GW A5  
Pressure switch switches  
when the setpoint is exceeded  
or undershot.
  - GW A5/1  
Pressure switch with damping  
nozzle switches on if the set  
reference value is exceeded  
or undershot.

## Order example

### Pressure switch design

Pressure Switch GW...A5

### Setting range

5 - 150 mbar

### Contact material

Ag

### Electrical connection

Equipment connector

### Pressure connection


At position 12

### Test nipple

MS 6

**GW 150 A5 [Ag-G3-MS6-V12]**



## Dimensions [mm]

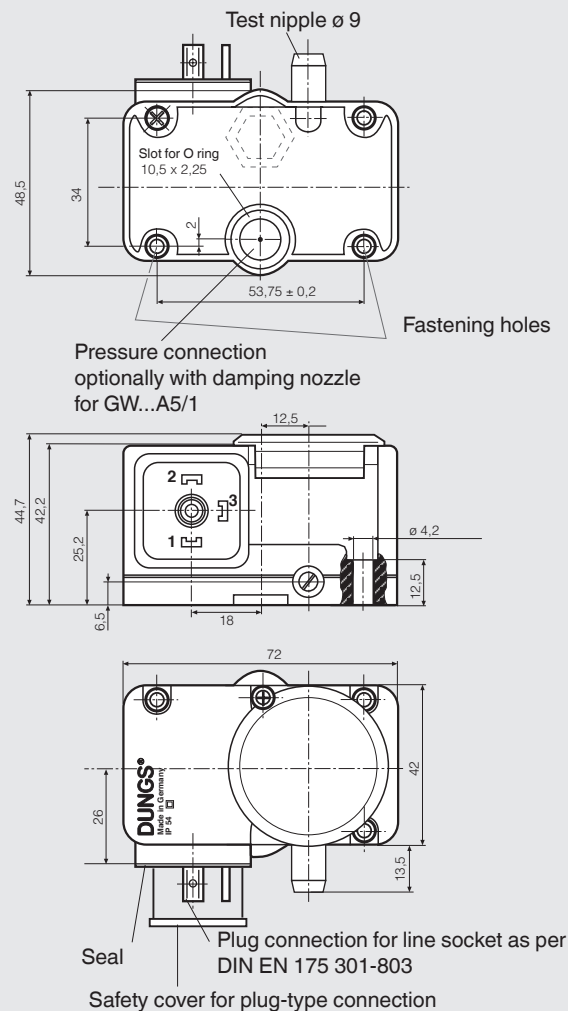

## Mounting options GW...A5 GasMultiBloc MB-...053/403

### Pressure tap GW...A5 mounting possible ...

|   |                                                                                       |
|---|---------------------------------------------------------------------------------------|
| 1 | yes, with # 221630                                                                    |
| 2 | yes  |
| 3 | yes  |
| 4 | yes, with # 221630                                                                    |



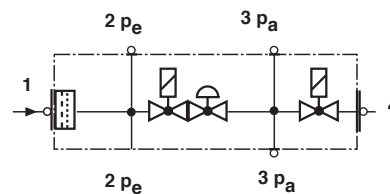
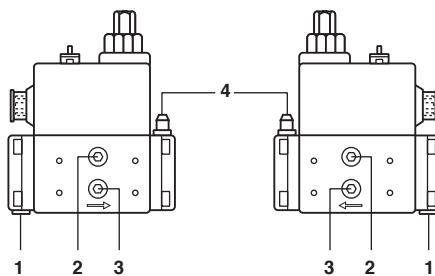


- 1,3 seal plug G 1/8  
2 Instrument gland, optional  
4 Instrument gland

## Mounting options GW...A5 GasMultiBloc MB-D..405 - 412; MB-ZR.. 405 - 412

### Pressure tap GW...A5 mounting possible ...


|   |                                                                                                        |
|---|--------------------------------------------------------------------------------------------------------|
| 1 | alternative to 7      |
| 2 | no                                                                                                     |
| 3 | yes                  |
| 4 | yes                 |
| 5 | yes, with # 214 975                                                                                    |
| 6 | yes, with # 221 630                                                                                    |
| 7 | yes,<br>(standard)  |

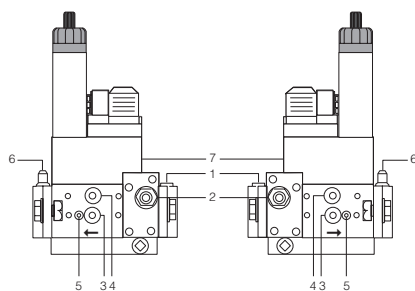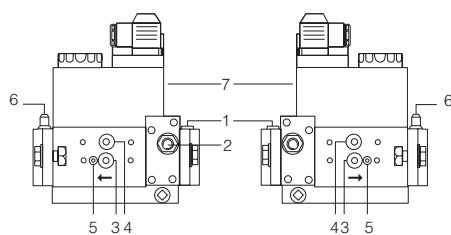

- 1,3,4 seal plug G 1/8  
2,6 Instrument gland, optional G 1/8  
5 M4 inner hex

## Anbaumöglichkeiten GW...A5 an Vorbaufilter für Dungs- Mehrfachstellgerät


### Druckabgriff nach Filtereinsatz

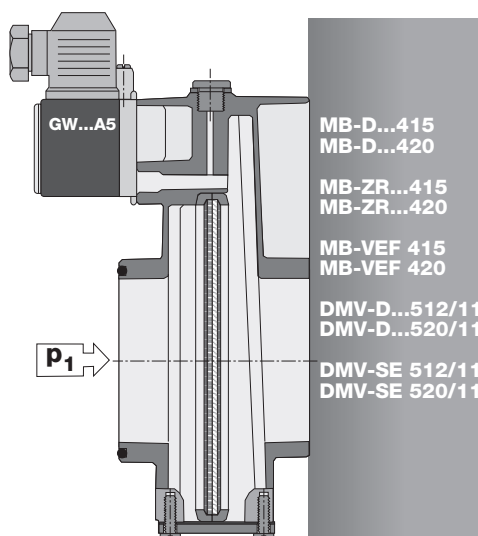


**Mounting options GW...A5**  
**Double solenoid valve DMV 503/11**

**Pressure tap GW...A5**  
**mounting possible ...**

|   |                                                   |                                                                                   |
|---|---------------------------------------------------|-----------------------------------------------------------------------------------|
| 1 | yes                                               |  |
| 2 | yes                                               |  |
| 3 | yes, with # 214975                                |                                                                                   |
| 4 | yes (horizontal),<br>with # 221 630<br>(vertical) |                                                                                   |

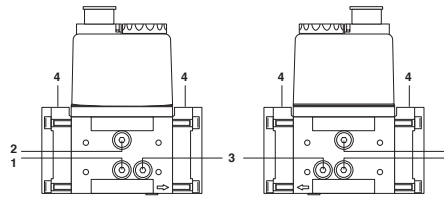

**1,2,4**  
 G 1/8 seal plug as per  
 DIN ISO 228  
**3**  
 Seal Plug as per M4


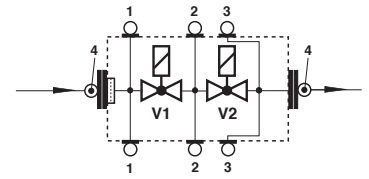


The seal plugs **1,2,4** can also be replaced by a G 1/8 instrument gland as per DIN ISO 228


**Mounting options GW...A5**  
**Double solenoid valve DMV 507-520/11**  
**GasMultiBloc MB-...415 - 420**  
**MBC-300/700/1200**

**Pressure tap GW...A5**  
**mounting possible ...**

|   |                          |                                                                                    |
|---|--------------------------|------------------------------------------------------------------------------------|
| 1 | yes (GW <sub>min</sub> ) |   |
| 2 | yes (GW <sub>min</sub> ) |  |
| 3 | yes (GW <sub>VPS</sub> ) |                                                                                    |
| 4 | yes                      |                                                                                    |
| 5 | yes                      |                                                                                    |

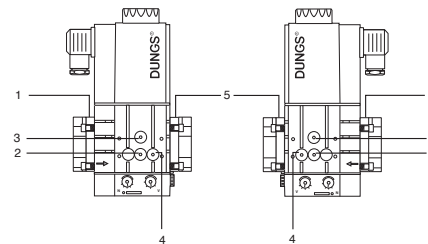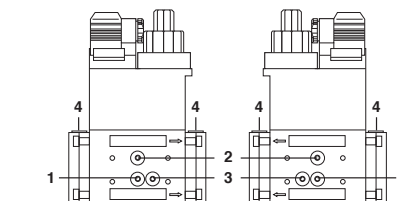

**1,2,3,4**  
 G 1/8 seal plug as per  
 DIN ISO 228

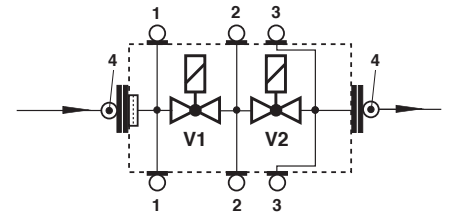


The seal plugs **1,2,3,4** can also be replaced by a G 1/8 instrument gland as per DIN ISO 228


**Mounting options GW...A5**  
**Double solenoid valve**  
**DMV 525, DMV 5040/11-5125/11**  
**DMV-1500-D, DMV...-65 - DMV...-125**  
**MBC...-65 - MBC...-100 (pressure tap 4 no)**

**Pressure tap GW...A5**  
**mounting possible ...**

|   |     |                                                                                     |
|---|-----|-------------------------------------------------------------------------------------|
| 1 | yes |  |
| 2 | yes |  |
| 3 | yes |  |
| 4 | yes |  |
| 5 | no  |                                                                                     |
| 6 | no  |                                                                                     |

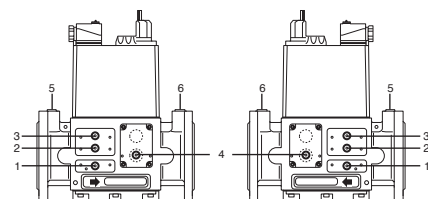

**1,2,3,4**  
 G 1/8 seal plug as per  
 DIN ISO 228  
**5,6**  
 G 1/4 DIN ISO 228

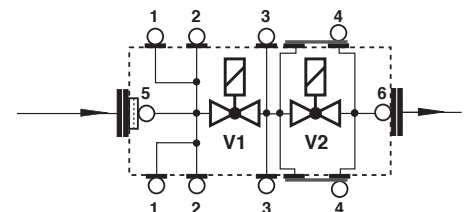

The seal plugs **1, 2,3,4** can also be replaced by a G 1/8 instrument gland as per DIN ISO 228

**Compact pressure switch  
for multiple actuators**

**GW...A5  
GW...A5/1**

**DUNGS®**  
Combustion Controls

**Brief technical data** 1 mbar = 100 Pa = 0,1 kPa ≈ 10 mm WS

| Type                                                                                   | Version<br>[AG-G3-MS6-V12] | Order No.      | Setting range<br>[mbar] | Switching difference<br>Δp [mbar] |
|----------------------------------------------------------------------------------------|----------------------------|----------------|-------------------------|-----------------------------------|
| <b>GW...A5<br/>pressure switch<br/>with mounting kit</b>                               | GW 3 A5                    | <b>229 250</b> | 0,7 - 3                 | ≤ 0,7                             |
|                                                                                        | GW 10 A5                   | <b>225 938</b> | 2 - 10                  | ≤ 1                               |
|                                                                                        | GW 50 A5                   | <b>225 939</b> | 5 - 50                  | ≤ 2,5                             |
|                                                                                        | GW 150 A5                  | <b>225 940</b> | 5 - 150                 | ≤ 5                               |
|                                                                                        | GW 500 A5                  | <b>227 639</b> | 100 - 500               | ≤ 15                              |
| Supplied in collective packaging                                                       |                            |                |                         |                                   |
| <b>GW...A5<br/>pressure switch<br/>with damping ori-<br/>fice and mounting<br/>kit</b> | GW 10 A5/1                 | <b>241 245</b> | 2 - 10                  | ≤ 1                               |
|                                                                                        | GW 50 A5/1                 | <b>241 246</b> | 5 - 50                  | ≤ 2,5                             |
|                                                                                        | GW 150 A5/1                | <b>241 247</b> | 5 - 150                 | ≤ 5                               |
|                                                                                        | GW 500 A5/1                | <b>241 248</b> | 100 - 500               | ≤ 15                              |
| Supplied in collective packaging                                                       |                            |                |                         |                                   |

| Accessories                                        | Order-No. | for Type                                                    | Nominal diameters                               |
|----------------------------------------------------|-----------|-------------------------------------------------------------|-------------------------------------------------|
| Mounting kit (2 x M4x20, 1 x O-ring)               | 223 280   |                                                             |                                                 |
| Adapter p <sub>Br</sub>                            | 214 975   | MB-D ...405 - 420<br>MB-Z ...405 - 420<br>DMV- ...503 - 520 | Rp 3/8 - Rp 2<br>Rp 3/8 - Rp 2<br>Rp 3/8 - Rp 2 |
| Adapter on<br>threaded flange (G 1/8)              | 221 630   | MB- ...405-412<br>DMV- ...<br>SV- ...505-520                | Rp 3/8 - Rp 1 1/4<br>Rp 3/8 - Rp 2              |
| Adapter kit for GW ... A5<br>with G 1/4 connection | 222 982   | DMV- ...<br>MB- ...415-420                                  | Rp 3/8 - Rp 2                                   |
| Special adapter on request                         |           | MB- ...<br>DMV- ...<br>MVD- ...                             | DN 40 - DN 125<br>Rp 3/8 - DN 150               |
| Line socket 3-pin + E<br>grey GDMW                 | 210 318   |                                                             |                                                 |